

skheme®



aspley

# aspley



pearl




tawn




greige



gris

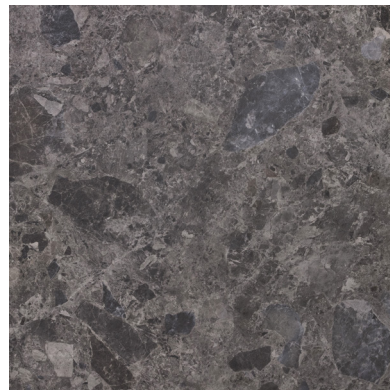

grafito

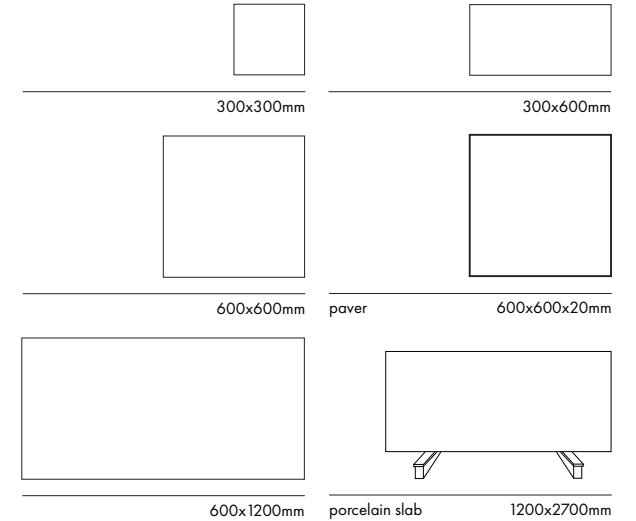

fire resistant



sustainable



slab available



outdoor



paver



P2 slip rating



P3 slip rating



P5 slip rating



V2 variation

## PRODUCT SPECIFICATIONS

format	size	finish	thickness	slip rating	colour
tile	300x300mm	matt	10mm	P3	all colours
tile	300x600mm	matt   grip	10mm	P3   P5	all colours
tile	600x600mm	matt   grip	10mm	P3   P5	all colours
paver	600x600mm	grip	20mm	P5	all colours
tile	600x1200mm	matt	10mm	P2	all colours
slab	1200x2700mm	matt	6mm	P2	pearl   greige   gris

## MATERIAL

glazed porcelain

## VARIATION

V2

## TILE EDGE

rectified


Colours shown in images may differ due to variations in photographic conditions and screen displays. Samples provided may not accurately reflect the exact shade or batch supplied, as variation is an inherent property of tiles and stone.

Listed sizes are nominal and may vary slightly from actual working dimensions.

A 2/12-14 Neild Avenue Rushcutters Bay NSW 2010 | P 02 8755 2300 | W [www.skheme.com](http://www.skheme.com) | E [info@skheme.com](mailto:info@skheme.com)



left pictured: greige  
right pictured: pearl

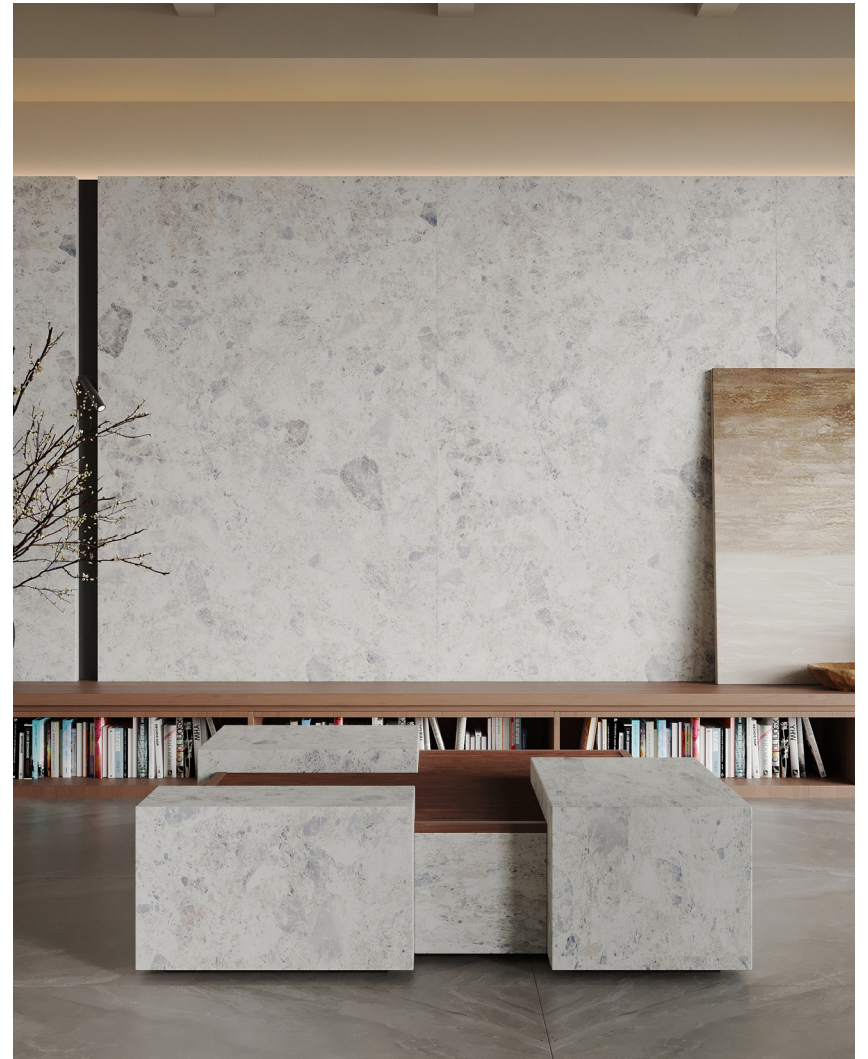

left pictured: greige  
right pictured: greige



## technical data - tile

properties	test method	prescribed values	value
WATER ABSORPTION	ISO 10545-3	E<0.5%	0.08%
BENDING STRENGTH	ISO 10545-4	≥ 12 MPA	≥ 33.5MPA
BREAKING STRENGTH	ISO 10545-4	≥ 1300 N	2573 N
ABRASION RESISTANCE	ISO 10545-7	Report abrasion class	Pass
RESISTANCE TO CHEMICALS	ISO 10545-13	Household chemicals & swimming pool salts	GA
		Low concentration of acids & alkalis	GLA
RESISTANCE TO STAINING	ISO 10545-14	Minimum class 3	Class 5



ISO 14001:2015 specifies the requirements for an environmental management system that an organization can use to enhance its environmental performance. It is intended for use by an organization seeking to manage its environmental responsibilities in a systematic manner that contributes to the environmental pillar of sustainability.



**AN ENVIRONMENTAL PRODUCT DECLARATION (EPD)** is a globally recognised certification that outlines the environmental impact of a product across its entire life cycle. It supports sustainable decision-making and green procurement by assessing factors such as material sourcing, emissions, installation, use, and end-of-life disposal.



Please note that all products must be fabricated using score & snap method and/or wet cutting in conjunction with AS/NZS 1716:2012, AS/NZS 1715:2009, AS/NZS 60335.2.69:2017. For more information please refer to: <https://www.safework.nsw.gov.au>

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

A 2/12-14 Neild Avenue Rushcutters Bay NSW 2010 | P 02 8755 2300 | W [www.skheme.com](http://www.skheme.com) | E [info@skheme.com](mailto:info@skheme.com)

## technical data - paver

**IMPORTANT NOTE:** The installer shall ensure that all porcelain pavers and coping are installed in accordance with the applicable Australian Standards and the adhesive manufacturer's instructions.

properties	test method	prescribed values	value
WATER ABSORPTION	ISO 10545-3	E<0.5%	0.04%
BENDING STRENGTH	ISO 10545-4	Minimum 35	45.60
BREAKING STRENGTH	ISO 10545-4	≥ 1300 N	11427
ABRASION RESISTANCE	ISO 10545-7	Report abrasion class	Pass
RESISTANCE TO CHEMICALS	ISO 10545-13	Household chemicals & swimming pool salts	GA
		Low concentration of acids & alkalis	GLA
RESISTANCE TO STAINING	ISO 10545-14	Minimum class 3	Class 5



ISO 14001:2015 specifies the requirements for an environmental management system that an organization can use to enhance its environmental performance. It is intended for use by an organization seeking to manage its environmental responsibilities in a systematic manner that contributes to the environmental pillar of sustainability.



**AN ENVIRONMENTAL PRODUCT DECLARATION (EPD)** is a globally recognised certification that outlines the environmental impact of a product across its entire life cycle. It supports sustainable decision-making and green procurement by assessing factors such as material sourcing, emissions, installation, use, and end-of-life disposal.



Please note that all products must be fabricated using score & snap method and/or wet cutting in conjunction with AS/NZS 1716:2012, AS/NZS 1715:2009, AS/NZS 60335.2.69:2017. For more information please refer to: <https://www.safework.nsw.gov.au>

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

A 2/12-14 Neild Avenue Rushcutters Bay NSW 2010 | P 02 8755 2300 | W [www.skheme.com](http://www.skheme.com) | E [info@skheme.com](mailto:info@skheme.com)

## technical data - 6mm porcelain slab

properties	test method	prescribed value	value
WATER ABSORPTION	ISO 10545-3	≤0.5%	0.05
MODULUS OF RUPTURE	ISO 10545-4	Individual min. 45 MPA	53 MPA
BREAKING STRENGTH	ISO 10545-4	≥ 800	12010 N
ABRASION RESISTANCE	ISO 10545-7	Min. class 3 (750 cycles)	Class 4
RESISTANCE TO CHEMICALS	ISO 10545-13	Household chemicals & swimming pool salts	GA
		Low concentration of acids & alkalis	GLA
RESISTANCE TO STAINING	ISO 10545-14	Minimum class 3	Class 5
CRAZING RESISTANCE	ISO 10545-13	No cracking or peeling	Pass



ISO 14001:2015 specifies the requirements for an environmental management system that an organization can use to enhance its environmental performance. It is intended for use by an organization seeking to manage its environmental responsibilities in a systematic manner that contributes to the environmental pillar of sustainability.



Please note that all products must be fabricated using score & snap method and/or wet cutting in conjunction with AS/NZS 1716:2012, AS/NZS 1715:2009, AS/NZS 60335.2.69:2017. For more information please refer to: <https://www.safework.nsw.gov.au>

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

A 2/12-14 Neild Avenue Rushcutters Bay NSW 2010 | P 02 8755 2300 | W [www.skheme.com](http://www.skheme.com) | E [info@skheme.com](mailto:info@skheme.com)