

skheme®



aspley

aspley



pearl



tawn



graffito



greige



gris




300x300mm



600x600mm



300x600mm



600x1200mm



fire resistant



sustainable



outdoor



slab available



paver




P3



P4



P5



V2 variation

PRODUCT SPECIFICATIONS

format	size	finish	thickness	slip rating	colour
tile	300x300mm	matt	10mm	P3	all colours
tile	300x600mm	matt grip	10mm	P3 P4	all colours
tile	600x600mm	matt grip	10mm	P3 P4	all colours
paver	600x600mm	grip	20mm	P5	all colours
tile	600x1200mm	matt	10mm	P3	all colours
slab	1200x2700mm	matt	6mm	P2	pearl greige gris

MATERIAL

glazed porcelain

VARIATION

V2

TILE EDGE

rectified


Colours shown in images may differ due to variations in photographic conditions and screen displays. Samples provided may not accurately reflect the exact shade or batch supplied, as variation is an inherent property of tiles and stone.

Listed sizes are nominal and may vary slightly from actual working dimensions.


A 2/12-14 Neild Avenue Rushcutters Bay NSW 2010 | P 02 8755 2300 | W www.skheme.com | E info@skheme.com



left pictured: greige
right pictured: pearl

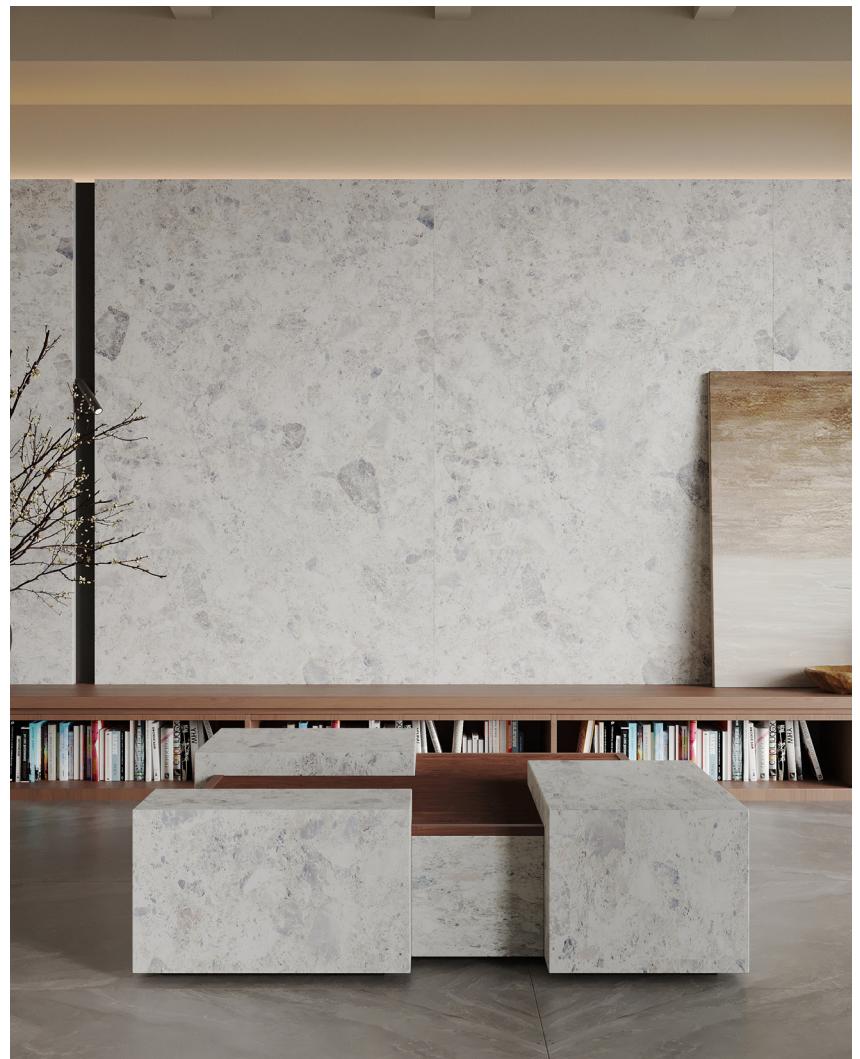

left pictured: greige
right pictured: greige

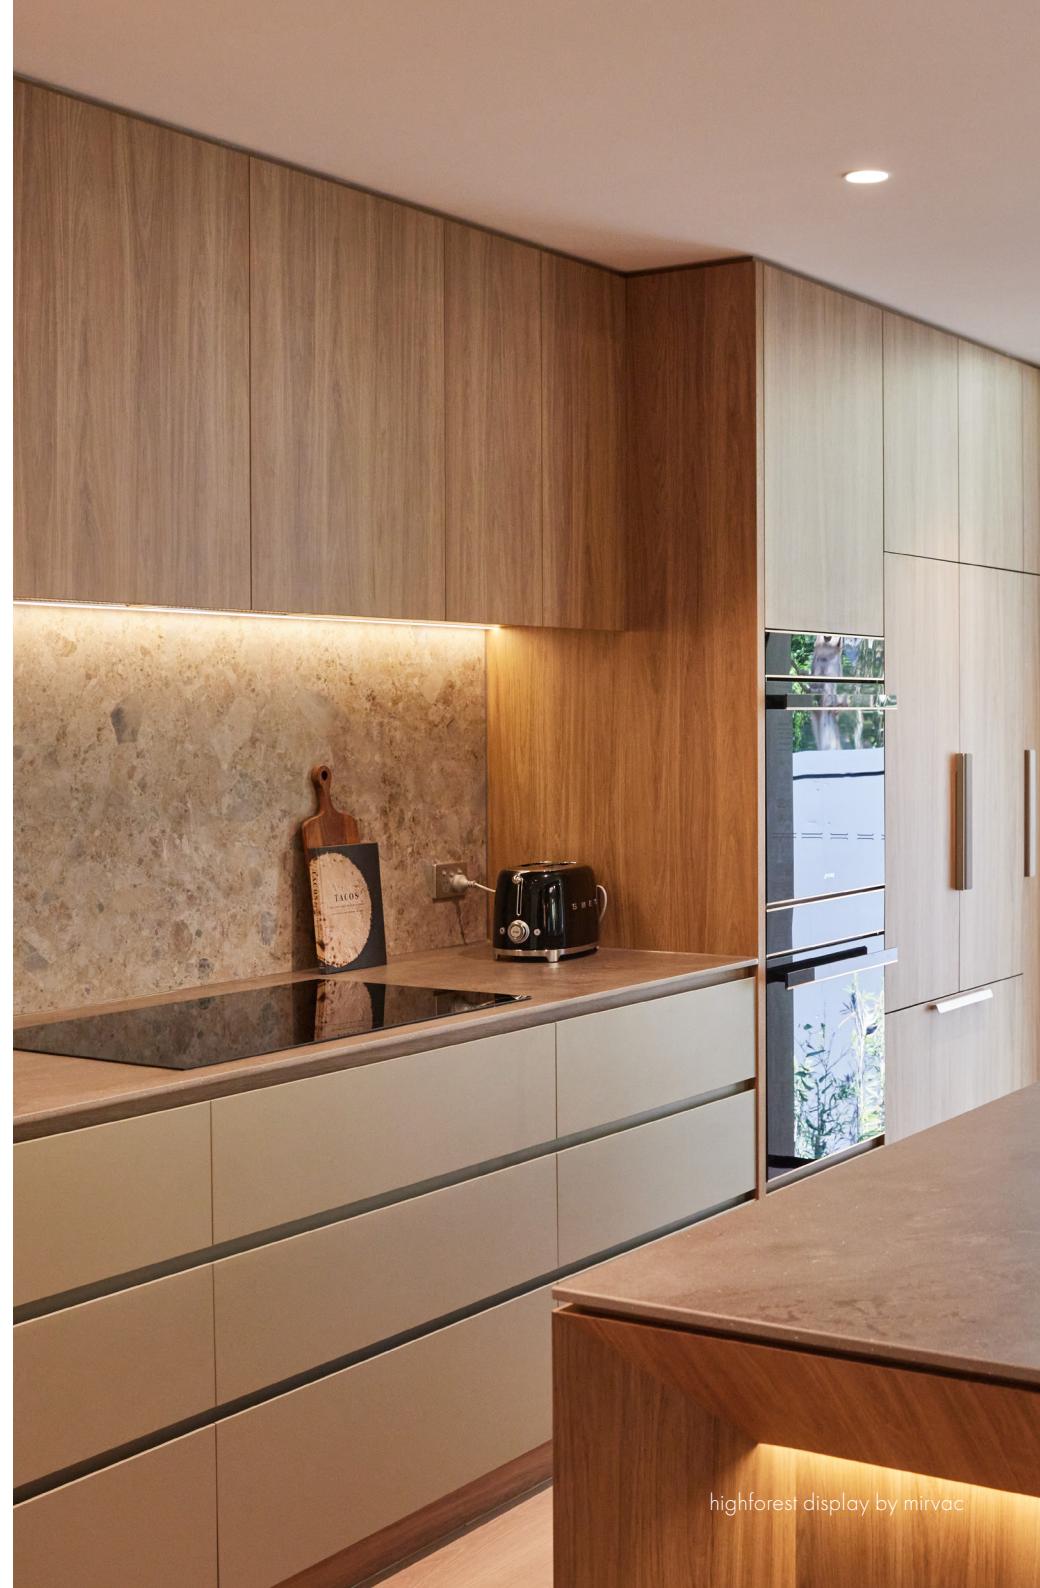

highforest display by mirvac

technical data - tiles

PROPERTIES	TEST METHOD	PRESCRIBED VALUES	VALUE
water absorption	ISO 10545-3	$\leq 0.5\%$	$\leq 0.1\%$
bending strength	ISO 10545-4	$\geq 12 \text{ MPA}$	$\geq 33.5 \text{ MPA}$
breaking strength	ISO 10545-4	$\geq 1300 \text{ N}$	2265 N
abrasion resistance	ISO 10545-7	Max. 175 mm ³ PEI 1-5	class 3
resistance to chemicals	ISO 10545-13	Household chemicals & swimming pool salts Low concentration of acids & alkalis	GA GLA
resistance to staining	ISO 10545-14	Minimum class 3	class 5



ISO 14001:2015 specifies the requirements for an environmental management system that an organization can use to enhance its environmental performance. ISO 14001:2015 is intended for use by an organization seeking to manage its environmental responsibilities in a systematic manner that contributes to the environmental pillar of sustainability.



Please note that all products must be fabricated using score & snap method and/or wet cutting in conjunction with AS/NZS 1716:2012, AS/NZS 1715:2009, AS/NZS 60335.2.69:2017. For more information please refer to: <https://www.safework.nsw.gov.au>

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.


A 2/12-14 Neild Avenue Rushcutters Bay NSW 2010 | P 02 8755 2300 | W www.skheme.com | E info@skheme.com

technical data - pavers

PROPERTIES	TEST METHOD	PRESCRIBED VALUES	VALUE
water absorption	ISO 10545-3	$\leq 0.5\%$	$\leq 0.1\%$
bending strength	ISO 10545-4	$\geq 12 \text{ MPA}$	$\geq 33.5 \text{ MPA}$
breaking strength	ISO 10545-4	$\geq 1300 \text{ N}$	8500 N
abrasion resistance	ISO 10545-7	Max. 175 mm ³ PEI 1-5	class 3
resistance to chemicals	ISO 10545-13	Household chemicals & swimming pool salts	GA
		Low concentration of acids & alkalis	GLA
resistance to staining	ISO 10545-14	Minimum class 3	class 5



ISO 14001:2015 specifies the requirements for an environmental management system that an organization can use to enhance its environmental performance. ISO 14001:2015 is intended for use by an organization seeking to manage its environmental responsibilities in a systematic manner that contributes to the environmental pillar of sustainability.

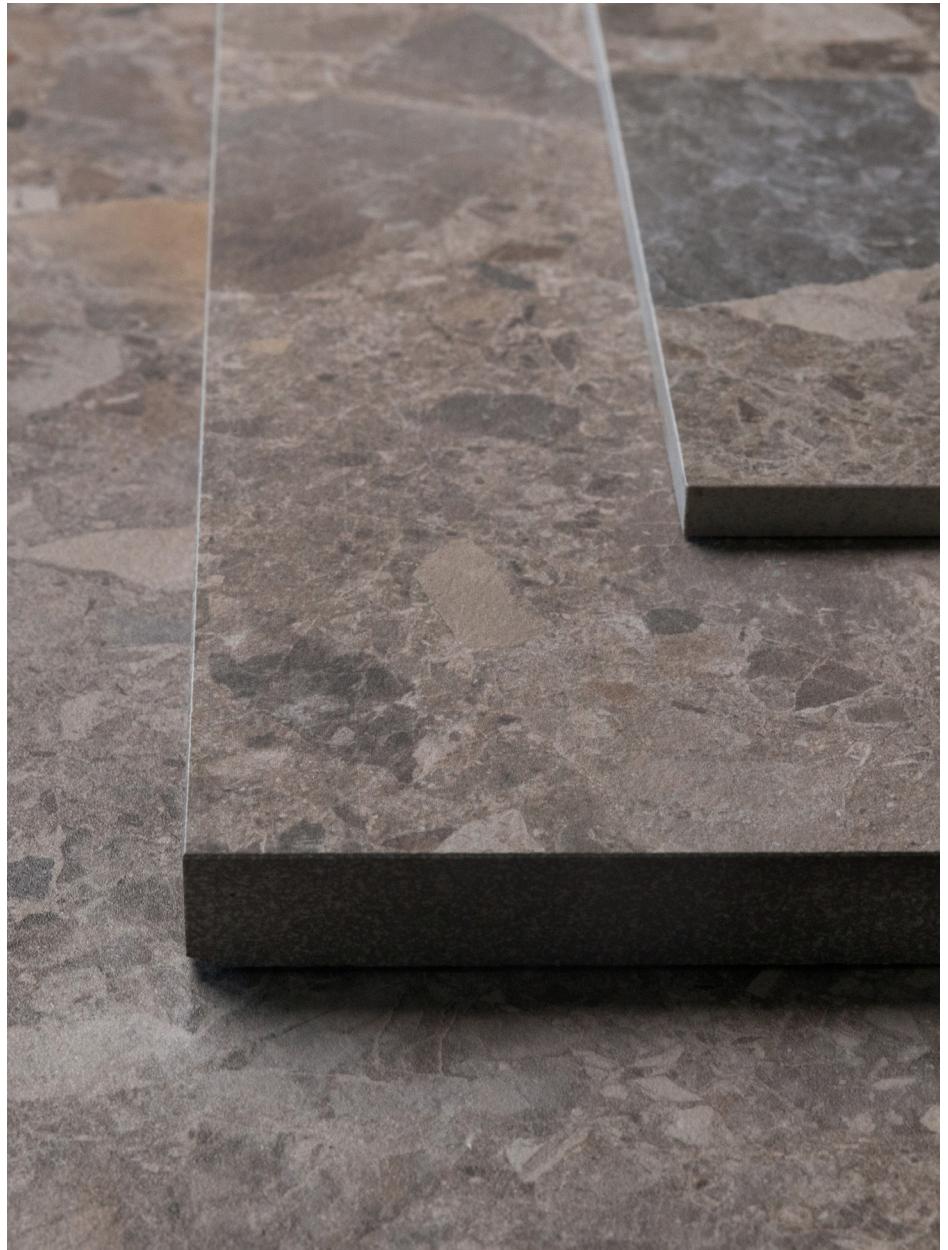

Please note that all products must be fabricated using score & snap method and/or wet cutting in conjunction with AS/NZS 1716:2012, AS/NZS 1715:2009, AS/NZS 60335.2.69:2017. For more information please refer to: <https://www.safework.nsw.gov.au>

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

A 2/12-14 Neild Avenue Rushcutters Bay NSW 2010 | P 02 8755 2300 | W www.skheme.com | E info@skheme.com